Upholstery Collections

PEDRALI®

FF_24/00

Material for upholstery and cushions

Rivestimenti per imbottiture e cuscini

category		card
A		11
C		04, 05, 06, 07, 10
D		05, 07
D	outdoor	08, 09
E		14
F		13
G		01, 02, 03, 04, 05, 06, 14
H		06, 07, 11, 14
N		03, 07, 14
N	outdoor	08
P		12

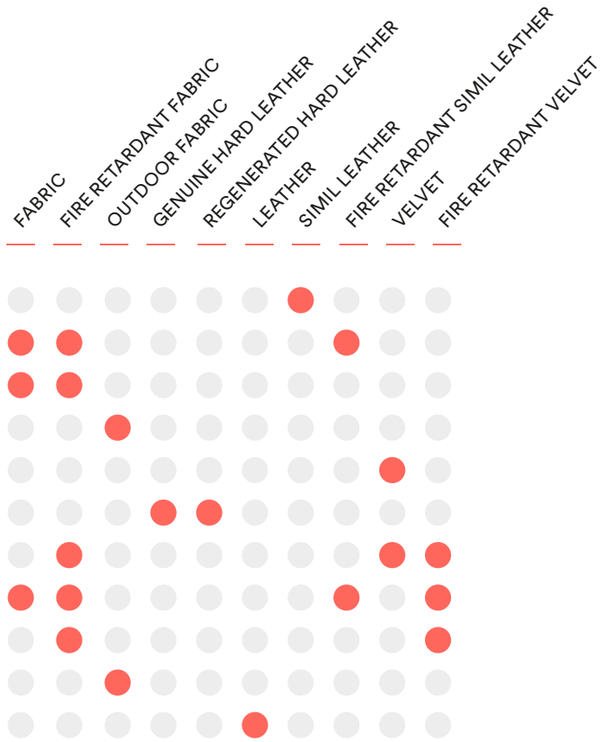

Colours of samples are approximate. Pedrali S.p.A. reserves the right to modify or upgrade the products without prior notice.
I colori dei campioni sono indicativi. Pedrali S.p.A. si riserva la facoltà di apportare modifiche o migliorie senza alcun preavviso.

Legend

Legenda

Fire-retardant
Ignifugo

Outdoor use
Adatto per uso esterno

washing / lavaggio

Do not wash
Lavaggio a secco

Hand wash
Lavaggio a mano

Wash at max 30°C normal
Lavaggio normale, max 30°C

Wash at max 30°C mild
Lavaggio delicato, max 30°C

Wash at max 40°C normal
Lavaggio normale, max 40°C

Wash at max 60°C mild
Lavaggio delicato, max 60°C

dry cleaning / lavaggio a secco

Do not dry clean
Lavaggio a secco non consentito

Dry clean, perchlorethylene (PCE)
Lavaggio a secco con percloroetilene (PCE)

Gentle dry cleaning with PCE
Lavaggio a secco delicato con PCE

drying / asciugatura

Tumble dry at low temperature
Asciugatrice a bassa temperatura

Do not tumble dry
Non asciugare in asciugatrice

Dry flat
Asciugare disteso

Do not wring
Non strizzare

ironing / stiratura

Do not iron
Non stirare

Iron at low temperature
Stirare a bassa temperatura

Iron at medium temperature
Stirare a media temperatura

bleaching / candeggio

Do not bleach
Non candeggiare

Any bleaching agent allowed
Candeggio consentito

Compliant to Ecolabel UE environmental requirements
Conforme ai requisiti ambientali Ecolabel UE

Product certified for low chemical emissions:
Prodotto certificato per basse emissioni di sostanze chimiche:
UL.COM/GG
UL 2818

96/98/CE – 2010/68/UE EU marine equipment rules compliant
Conforme ai requisti europei per equipaggiamenti marittimi

01

Fabrics
Tessuti

category G

PEDRALI®

G

	G59÷G69 | G190÷G197	G70÷G78
COMPOSITION COMPOSIZIONE	90% New wool 10% Nylon	90% New wool 10% Nylon
WEIGHT GRAMMATURA	550 g/m² (16.22 oz/yd²)	590 g/m² (17.37 oz/yd²)
ABRASION ABRASIONE	100.000 cycles Martindale (EN ISO 12947)	100.000 cycles Martindale (EN ISO 12947)
RUBBING FASTNESS SOLIDITÀ ALLO SFREGAMENTO	Dry and Wet 4-5, scale 1-5 (ISO 105-X12)	Dry 4 and Wet 3-4, scale 1-5 (ISO 105-X12)
PILLING	4, scale 1-5 (EN ISO 12945)	3-4, scale 1-5 (EN ISO 12945)
LIGHT FASTNESS SOLIDITÀ ALLA LUCE	6-7, scale 1-8 (ISO 105-B02)	6, scale 1-8 (ISO 105-B02)
SOUND ABSORPTION ASSORBIMENTO ACUSTICO	folded: α_w=0.95 Class A (EN ISO 354)	folded: α_w=0.80 Class B (EN ISO 354)
FLAME RESISTANCE RESISTENZA AL FUOCO	AS/NZS 1530.3 AS/NZS 3837 Class 2 ASTM E84 Class B Adhered ASTM E84 Class B Unadhered BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 IMO FTP Code 2010: Part 8 NF D60-013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	AS/NZS 1530.3 AS/NZS 3837 Class 2 ASTM E84 Class B Adhered ASTM E84 Class A Unadhered BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 EN 13501, B-s2, d1, with treatment IMO FTP Code 2010: Part 8 NF D60-013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)
APPROVED OMOLOGATO	EU Ecolabel www.ecolabel.eu GREENGUARD GOLD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL COM/GG UL 2818 170166-420	
CLEANING LAVAGGIO		

G

Collection / Collezione

• kvadrat

STEELCUT TRIO
from G59 to G69
from G190 to G197

DESIGNERS Dijkmeijer & Ridolfo

G 66



G 190



G 67



G 59



G192

G 69



G 191



G 193

G 195



G 196

G 197



G 68



G 194



G 63

G 62



G 64



G 65

Collection / Collezione

• kvadrat

STEELCUT
from G70 to G78

DESIGNERS Dijkmeijer & Ridolfo

G 71



G 73



G 75



G 78



G 70

02

Fabrics
Tessuti

category G

PEDRALI®

G

	G159÷G169	G250÷G258	G21÷G24 | G111÷G116
COMPOSITION COMPOSIZIONE	97% New wool 3% Recycled nylon	97% New wool 3% Recycled nylon	100% New wool
WEIGHT GRAMMATURA	415 g/m² (12.21 oz/yd²)	400 g/m² (11.80 oz/yd²)	560 g/m² (16.52 oz/yd²)
ABRASION ABRASIONE	45.000 cycles Martindale (EN ISO 12947)	45.000 cycles Martindale (EN ISO 12947)	45.000 cycles Martindale (EN ISO 12947)
RUBBING FASTNESS SOLIDITÀ ALLO SFREGAMENTO	Dry and Wet 4-5, scale 1-5 (ISO 105-X12)	Dry and Wet 4-5, scale 1-5 (ISO 105-X12)	**G21÷G24:** Dry 5 and Wet 3-4 **G111÷G116:** Dry and Wet 4-5 scale 1-5 (ISO 105-X12)
PILLING	3-4, scale 1-5 (EN ISO 12945)	3-4, scale 1-5 (EN ISO 12945)	3, scale 1-5 (EN ISO 12945)
LIGHT FASTNESS SOLIDITÀ ALLA LUCE	6, scale 1-8 (ISO 105-B02)	6, scale 1-8 (ISO 105-B02)	**G21÷G24:** 6-7 — **G111÷G116:** 5-6 scale 1-8 (ISO 105-B02)
SOUND ABSORPTION ASSORBIMENTO ACUSTICO	folded: α_w=0.80 Class B (EN ISO 354)	folded: α_w=0.80 Class B (EN ISO 354)	folded: α_w=0.70 Class C (EN ISO 354)
FLAME RESISTANCE RESISTENZA AL FUOCO	AS/NZS 3837 Class 2 ASTM E84 Class A Adhered ASTM E84 Class A Unadhered BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 EN 13773 Class 1 with treatment IMO FTP Code 2010: Part 8 NF D60-013 NFPA 701 with treatment SN 198 898 5.3 with treatment UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	AS/NZS 3837 Class 1 ASTM E84 Class A Adhered ASTM E84 Class A Unadhered BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 EN 13773 Class 1 with treatment IMO FTP Code 2010: Part 8 NF D60-013 NFPA 701 with treatment ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	AS/NZS 1530.3 ASTM E84 Class A Adhered ASTM E84 Class A Unadhered with treatment ASTM E84 Class B Unadhered BS 5852 Part 1 BS 5852 Crib 5 with treatment BS 5867 Part 2 type B EN 1021 – 1/2 EN 13501, B-s2, d0, with treatment IMO FTP Code 2010: Part 8 NF D60-013 NFPA 260 NFPA 701 with treatment ÖNORM B1/Q1 JIS L 1091 A-1 D CAN ULC S109 with treatment SN 198 898 5.3 with treatment UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant hemicals (AB 2998)
APPROVED OMOLOGATO	EU Ecolabel www.ecolabel.eu GREENGUARD GOLD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL.COM/GG UL 2818 170166-420		
CLEANING LAVAGGIO			

G

Collection / Collezione

• kvadrat

HERO
from G159 to G169

DESIGNER Patricia Urquiola

G 163

G 160

G 161

G 162

G 167

G 159

G 166

G 168

G 169

Collection / Collezione

• kvadrat

HERO HEATHER
from G250 to G258

DESIGNER Patricia Urquiola

G 250

G 251



G 252

G 253

G 254

G 255

G 256

G 257

G 258



Collection / Collezione

• kvadrat

DIVINA MELANGE
from G21 to G24

DIVINA MD
from G111 to G116

DESIGNER Finn Sködt

G 24

G 114

G 115

G 116

G 111



G 22

G 21

03

Fabrics
Tessuti

category G | N

PEDRALI

	G				N
	G100÷G102	**G120÷G122**	**G220÷G225**	**G240÷G244**	**N01÷N08**
COMPOSITION COMPOSIZIONE	90% New wool 10% Nylon	100% New wool	52% Cotton 22% Viscose 14% Polyacrylic 6% Linen 3% Polyester 3% Nylon	43% Viscose 17% Polyacrylic 15% New wool 9% Cotton 8% Polyester 8% Linen	58% New wool 25% Viscose 8% Linen 5% Nylon 4% Polyester
WEIGHT GRAMMATURA	365 g/m² (10.76 oz/yd²)	493 g/m² (14.54 oz/yd²)	745 g/m² (21.97 oz/yd²)	720 g/m² (21.23 oz/yd²)	420 g/m² (12.39 oz/yd²)
ABRASION ABRASIONE	50.000 cycles Martindale (EN ISO 12947)	75.000 cycles Martindale (EN ISO 12947)	50.000 cycles Martindale (EN ISO 12947)	40.000 cycles Martindale (EN ISO 12947)	50.000 cycles Martindale (EN ISO 12947)
PILLING	4, scale 1-5 (EN ISO 12945)	3-4, scale 1-5 (EN ISO 12945)	4-5, scale 1-5 (EN ISO 12945)	3, scale 1-5 (EN ISO 12945)	3, scale 1-5 (EN ISO 12945)
LIGHT FASTNESS SOLIDITÀ ALLA LUCE	6-7, scale 1-8 (ISO 105-B02)	6-7, scale 1-8 (ISO 105-B02)	6, scale 1-8 (ISO 105-B02)	5-6, scale 1-8 (ISO 105-B02)	5, scale 1-8 (ISO 105-B02)
RUBBING FASTNESS SOLIDITÀ ALLO SFREGAMENTO	Dry and Wet 5, scale 1-5 (ISO 105-X12)	Dry 5 and Wet 4-5, scale 1-5 (ISO 105-X12)	Dry and Wet 4-5, scale 1-5 (ISO 105-X12)	Dry and Wet 4-5, scale 1-5 (ISO 105-X12)	Dry 4-5 and Wet 3-4, scale 1-5 (ISO 105-X12)
FLAME RESISTANCE RESISTENZA AL FUOCO	AS/NZS 3837 Class 2 BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 IMO FTP Code 2010: Part 8 NFPA 260 NF D60-013 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	AS/NZS 3837 Class 2 ASTM E84 Class A Adhered ASTM E84 Class B Unadhered BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 IMO FTP Code 2010: Part 8 NFPA 260 NF D60-013 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	AS/NZS 3837 Class 2 BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 IMO FTP Code 2010: Part 8 US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	AS/NZS 3837 Class 2 BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 IMO FTP Code 2010: Part 8 US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	AS/NZS 3837 Class 2 BS 5852 Crib 5 with treatment EN 1021 – 1/2 EN 13501, C-s1, d0, with treatment IMO FTP Code 2010: Part 8 with treatment NFPA 260 US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)
APPROVED OMOLOGATO	EU Ecolabel www.ecolabel.eu GREENGUARD GOLD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL.COM/GG UL 2818 170166-420			GREENGUARD GOLD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL.COM/GG UL 2818 170166-420	
CLEANING LAVAGGIO					

G

Collection / Collezione

• kvadrat

BASEL
from G100 to G102
DESIGNERS Herzog & de Meuron

G 101

G 100



G 102



Collection / Collezione

• kvadrat

MOLLY
from G120 to G122

DESIGNER Åsa Pärson

G 120

G 121

G 122

Collection / Collezione

• kvadrat - SAHCO

MOSS
from G220 to G225

DESIGNER Vincent Van Duysen

G 225

G 220

G 221

G 222

G 223

G 224

Collection / Collezione

• kvadrat - SAHCO

SAFIRE
from G240 to G244

G 240



G 241

G 242



G 243



G 244



N

Collection / Collezione

• kvadrat

SUNNIVA
from N01 to N08

DESIGNERS Raf Simons & Fanny Aronsen

N 05



N 01

N 08

N 02

N 06

N 07

04

Fabrics
Tessuti

category C | G

PEDRALI®

	C	G	
	C110÷C122	**G150÷G156**	**G130÷G133**
COMPOSITION COMPOSIZIONE	85% Wool 15% Polyamide	82% Wool 12% Rami 6% Polyamide	95% Virgin Wool 5% Polyamide
WEIGHT GRAMMATURA	330 g/m² (9.73 oz/yd²)	570 g/m² (16.81 oz/yd²)	660 g/m² (19.47 oz/yd²)
ABRASION ABRASIONE	100.000 cycles Martindale (EN ISO 12947-2)	100.000 cycles Martindale (EN ISO 12947-2)	52.000 cycles Martindale (EN ISO 12947-2)
RUBBING FASTNESS SOLIDITÀ ALLO SFREGAMENTO	Dry 4 and Wet 3-4, scale 1-5 (ISO 105-X12)	Dry 4 and Wet 3-4, scale 1-5 (ISO 105-X12)	/
PILLING	/	/	4-5, scale 1-5 (EN ISO 12945-2)
LIGHT FASTNESS SOLIDITÀ ALLA LUCE	5-7, scale 1-8 (ISO 105-B02)	5-7, scale 1-8 (ISO 105-B02)	5-8, scale 1-8 (ISO 105-B02)
SOUND ABSORPTION ASSORBIMENTO ACUSTICO	/	/	folded: α_w=0.85 Class B (ISO 11654)
FLAME RESISTANCE RESISTENZA AL FUOCO	BS 5852 Crib 5 EN 1021 – 1/2 IMO FTP Code 2010: Part 8 UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	BS 5852 Crib 5 EN 1021 – 1/2 IMO FTP Code 2010: Part 8 UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	BS 5852 Part 1 BS 5852 Crib 5 DIN 4102-1 B2 EN 1021 – 1/2 EN 13501-1 FAR 25.853 (12 sec. vertical) IMO: 2014/90/EU (MED) UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)
APPROVED OMOLOGATO	EU Ecolabel www.ecolabel.eu		
CLEANING LAVAGGIO			

C

Collection / Collezione

• svensson

SEMI
from C110 to C122

C 111



C 112



C 110



C 113

C 120



C 121



C122



C 118



C 119



C 117



C 114

C 115



C 116

G

Collection / Collezione

• svensson

BALANCE
from G150 to G156

G 151



G 154



G 155



G 156



G 150

G 152



G 153



G 130



G 133



G 132

G 131



05

Fabrics
Tessuti

category C | D | G

PEDRALI

	C	D	G
	C83÷C89 | C100, C101	**D40÷D44**	**G170÷G176 | G210÷G213**
COMPOSITION COMPOSIZIONE	54% New Zealand Wool 44% Post-consumer recycled polyester 2% Polyamide	88% New Zealand Wool 12% Polyamide	96% Virgin Wool 4% Polyamide
WEIGHT GRAMMATURA	307 g/m² (9.05 oz/yd²)	420 g/m² (12.39 oz/yd²)	660 g/m² (19.47 oz/yd²)
ABRASION ABRASIONE	100.000 cycles Martindale (EN ISO 12947-2)	100.000 cycles Martindale (EN ISO 12947-2)	90.000 cycles Martindale (EN ISO 12947-2)
RUBBING FASTNESS SOLIDITÀ ALLO SFREGAMENTO	Dry and Wet 4-5, scale 1-5 (ISO 105-X12)	Dry and Wet 4-5, scale 1-5 (ISO 105-X12)	/
PILLING	4-5, scale 1-5 (EN ISO 12945-2)	4-5, scale 1-5 (EN ISO 12945-2)	4-5, scale 1-5 (EN ISO 12945-2)
LIGHT FASTNESS SOLIDITÀ ALLA LUCE	5-7, scale 1-8 (ISO 105-B02)	5-7, scale 1-8 (ISO 105-B02)	5, scale 1-8 (ISO 105-B02)
SOUND ABSORPTION ASSORBIMENTO ACUSTICO	/	/	folded: α_w=0.95 Class A (ISO 11654)
FLAME RESISTANCE RESISTENZA AL FUOCO	EN 1021 – 1/2 EN 1021-1 ÖNORM A3800-1 US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	ASTM E84 Class 2 EN 1021 – 1/2 BS 5852 Part 1 0, 1 NF D60-013 UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	BS 5852 Part 1 BS 5852 Crib 5 with treatment DIN 4102-1 B2 with treatment EN 13501-1 with treatment EN 1021 – 1/2 FAR 25.853 (12 sec. vertical) with treatment IMO: 2014/90/EU (MED) UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)
APPROVED OMOLOGATO	EU Ecolabel	EU Ecolabel	
CLEANING LAVAGGIO			

C

C 101



C 86



C 83



C 100



C 85



C 89



C 87



C 84



C 88



D

D 40



D 41



D 43



D 44



D 42



G

G 175



G 176

G 173



G 174



G 170



G 171



G 172



G 211



G 210



G 213



G 212



06

Fabrics
Tessuti

category G | H | C

PEDRALI®

	G		H	C
	G200÷G206	**G140÷G146**	**H120÷H127**	**C210÷C217**
COMPOSITION COMPOSIZIONE	92% New wool 8% Nylon	45% Recycled wool 45% New wool 10% Nylon	90% New Wool 10% Nylon	100% TREVIRA CS®
WEIGHT GRAMMATURA	370 g/m² (10.91 oz/yd²)	385 g/m² (11.35 oz/yd²)	300 g/m² (8.85 oz/yd²)	320 g/m² (9.47 oz/yd²)
ABRASION ABRASIONE	80.000 cycles Martindale (EN ISO 12947)	100.000 cycles Martindale (EN ISO 12947)	100.000 cycles Martindale (EN ISO 12947)	80.000 cycles Martindale (EN ISO 12947)
RUBBING FASTNESS SOLIDITÀ ALLO SFREGAMENTO	Dry and Wet 5, scale 1-5 (ISO 105-X12)	Dry 4-5 and Wet 4, scale 1-5 (ISO 105-X12)	Dry and Wet 4, scale 1-5 (ISO 105-X12)	Dry and Wet 5, scale 1-5 (ISO 105-X12)
PILLING	4, scale 1-5 (EN ISO 12945)	4, scale 1-5 (EN ISO 12945)	4, scale 1-5 (EN ISO 12945)	4-5, scale 1-5 (EN ISO 12945)
LIGHT FASTNESS SOLIDITÀ ALLA LUCE	6-7, scale 1-8 (ISO 105-B02)	6, scale 1-8 (ISO 105-B02)	6, scale 1-8 (ISO 105-B02)	6-7, scale 1-8 (ISO 105-B02)
SOUND ABSORPTION ASSORBIMENTO ACUSTICO	/	folded: α_w=0.75 Class C (EN ISO 354)	folded: α_w=0.80 Class B (EN ISO 354)	folded: α_w=0.70 Class C (EN ISO 354)
FLAME RESISTANCE RESISTENZA AL FUOCO	AS/NZS 1530.3 AS/NZS 3837 Class 2 BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 IMO FTP Code 2010: Part 8 NF D60-013 SN 198 898 5.3 with treatment UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	AS/NZS 1530.3 AS/NZS 3837 Class 2 BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 EN 13501, B-s2, d0, with treatment IMO FTP Code 2010: Part 8 NF D60-013 SN 198 898 5.3 with treatment ÖNORM B1/Q1 UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	AS/NZS 1530.3 AS/NZS 3837 Class 2 ASTM E84 Class A Adhered ASTM E84 Class A Unadhered BS 5852 Part 1 BS 5852 Crib 5 with treatment EN 1021 – 1/2 EN 13501, B-s2, d0, with treatment GB 50222 B1 with treatment IMO FTP Code 2010: Part 7 with treatment IMO FTP Code 2010: Part 8 NF D60-013 NFPA 260 ÖNORM B1/Q1 SN 198 898 5.3 with treatment UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	AS/NZS 3837 Class 2 ASTM E84 Class B Adhered ASTM E84 Class A Unadhered BS 5852 Crib 5 with treatment BS 5852 Part 1 with treatment BS 5867 Part 2 type B DIN 4102 B1 EN 1021 – 1/2 EN 13501-1, B-s1, d0 GB 8624 B1 FAR 25.853 IMO FTP Code 2010: Part 8 IMO FTP Code 2010: Part 5 NF D60-013 NF P92 507 M1 NFPA 701 ÖNORM B1/Q1 CAN ULC S102 S109 SN 198 898 5.2 UNI 9177 Classe 1 UNI 9175 Classe 1 IM US CA TB 117-2013
APPROVED OMOLOGATO	PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL.COM/GG UL 2818 170166-420			
CLEANING LAVAGGIO				

G

Collection / Collezione

• kvadrat

JAALI
from G200 to G206

DESIGNER Doshi Levien

G 204 

G 205 

G 203 

G 206 

G 200 

G 201 

G 202 

Collection / Collezione

• kvadrat

RE-WOOL
from G140 to G146

DESIGNER Margrethe Odgaard

G 143 

G 145 

G 144

G 146

G 140

G 141

G 142

H

Collection / Collezione

• kvadrat

REMIX
from H120 to H127

DESIGNER Giulio Ridolfo

H 120 

H 121

H 123 

H 122 

H 125 

H 124 

H 126 

H 127 

C 216

C

Collection / Collezione

• kvadrat

RELATE
from C210 to C217

DESIGNER Patricia Urquiola

C 210 

C 211 

C 217 

C 212 

C 213 

C 214

C 215 

07

Fabrics
Tessuti

category D | H | N | C

PEDRALI®

	D	H	N	C
	D120÷D123	**H140÷H143**	**N30÷N38**	**C36÷C39**
COMPOSITION COMPOSIZIONE	22% Acrylic 22% Virgin Wool 22% Polyester 14% Viscose 13% Cotton 7% Linen	35% Wool 35% Acrylic 23% Polyester 7% Cotton	65% Wool 32% Cotton 3% Polyamide	94% Cotton 6% Polyamide
WEIGHT GRAMMATURA	580 g/m² (17.11 oz/yd²)	414 g/m² (12.21 oz/yd²)	746 g/m² (22.00 oz/yd²)	480 g/m² (14.16 oz/yd²)
ABRASION ABRASIONE	30.000 cycles Martindale (EN ISO 12947-2)	40.000 cycles Martindale (EN ISO 12947-2)	80.000 cycles Martindale (EN ISO 12947-2)	40.000 cycles, Martindale (EN ISO 12947-2)
PILLING	4, scale 1-5 (EN ISO 12945-2 to 5.000 rubs)	3-4, scale 1-5 (EN ISO 12945-2 to 5.000 rubs)	4-5, scale 1-5 (EN ISO 12945 to 5.000 rubs)	4, scale 1-5 (EN ISO 12945-2 to 5.000 rubs)
RUBBING FASTNESS SOLIDITÀ ALLO SFREGAMENTO	Dry 4-5 and Wet 3, scale 1-5 (ISO 105-X12)	Dry 4-5 and Wet 3, scale 1-5 (ISO 105-X12)	Dry 4-5 and Wet 3-4, scale 1-5 (ISO 105-X12)	Dry 4-5 and Wet 2-3, scale 1-5 (ISO 105-X12)
LIGHT FASTNESS SOLIDITÀ ALLA LUCE	5-6, scale 1-8 (ISO 105-B02)	5-6, scale 1-8 (ISO 105-B02)	4-5, scale 1-8 (ISO 105-B02)	4-5, scale 1-8 (ISO 105-B02)
FLAME RESISTANCE RESISTENZA AL FUOCO	BS 5852 Part 1 US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	EN 1021–1 BS 5852 Part 1 US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	BS 5852 Part 1 BS 5852 Crib 5 EN 1021 – 1/2 UNI 9175 Classe 1 IM US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	/
CLEANING LAVAGGIO				

D

D 120

D 121

D 122

D 123

H

H 143

H 140

H 141



H 142

N

Collection / Collezione

• DEDAR MILANO

A PERFECT FLOWER
from N30 to N38

N 30

N 31

N 32

N 33



N 34

N 35



N 36

N 37



N 38



C

C 37

C 38



C 39



C 36

08

Fabrics
Tessuti

category D | N

PEDRALI®

D **only for outdoor collections**
cushions / solo per cuscini
delle collezioni outdoor

N **only for outdoor accessory**
cushions / solo per cuscini
accessori outdoor

	D80÷D89	D130÷D133	N40÷N45
COMPOSITION COMPOSIZIONE	100% Acrylic	100% Polypropylene	100% Acrylic
WEIGHT GRAMMATURA	290 g/m^2 (8.55 oz/yd^2)	470 g/m^2 (13.86 oz/yd^2)	380 g/m^2 (11.21 oz/yd^2)
ABRASION ABRASIONE	> 20.000 cycles, Martindale (EN ISO 5470-2)	40.000 cycles, Martindale (EN ISO 12947-2)	24.000 cycles, Martindale (EN ISO 12947-2)
RUBBING FASTNESS SOLIDITÀ ALLO SFREGAMENTO	/	Dry 4-5 and Wet 4, scale 1-5 (ISO 105-X12)	Dry and Wet 4-5, scale 1-5 (ISO 105-X12)
PILLING	/	4-5, scale 1-5 (EN ISO 12945-2 to 5.000 rubs)	3-4, scale 1-5 (EN ISO 12945 to 5.000 rubs)
LIGHT FASTNESS SOLIDITÀ ALLA LUCE	8, scale 1-8 (ISO 105-B04)	7-8, scale 1-8 (ISO 105-B02)	6-7, scale 1-8 (ISO 105-B02)
WATER FASTNESS SOLIDITÀ ALL'ACQUA	8, scale 1-8 (ISO 105-B04)	7, scale 1-8 (ISO 105-B04)	7-8, scale 1-8 (ISO 105-B04)
FLAME RESISTANCE RESISTENZA AL FUOCO	/	BS 5852 Part 1 US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)
APPROVED OMOLOGATO		/	/
CLEANING LAVAGGIO	30°	40°	30° P

D

only for outdoor collections
cushions / solo per cuscini
delle collezioni outdoor

Collection / Collezione

• PEDRALI

FLORIDA
from D80 to D89

D 80

D 81

D 82



D 83



D 84

D 85



D 86



D 87



D 88



D 89



D 130

D 132

D 131



D 133

N

only for outdoor accessory
cushions / solo per cuscini
accessori outdoor

Collection / Collezione

• DEDAR MILANO

STRANGE LOVES
from N40 to N45

N 40

N 41

N 42



N 45

N 44

N 43



09

Fabrics
Tessuti

category D

PEDRALI®

D **only for outdoor collections cushions**
solo per cuscini delle collezioni outdoor

	D140÷D144	D22÷D26	D110÷D115	D100÷D105
COMPOSITION COMPOSIZIONE	100% Polypropylene	100% Polypropylene	88% Polypropylene 12% Polyester	100% Polypropylene
WEIGHT GRAMMATURA	520 g/m² (15.34 oz/yd²)	614 g/m² (18.11 oz/yd²)	470 g/m² (13.86 oz/yd²)	430 g/m² (12.68 oz/yd²)
ABRASION ABRASIONE	62.000 cycles, Martindale (EN ISO 13936-2)	> 30.000 cycles, Martindale (EN ISO 12947-2)	30.000 cycles, Martindale (EN ISO 12947-2)	50.000 cycles, Martindale (EN ISO 12947-2)
RUBBING FASTNESS SOLIDITÀ ALLO SFREGAMENTO	/	Dry and Wet 4-5, scale 1-5 (ISO 105-X12)	Dry 4-5 and Wet 4, scale 1-5 (ISO 105-X12)	Dry and Wet 4-5, scale 1-5 (ISO 105-X12)
PILLING	4, scale 1-5 (EN ISO 12945-2 to 5.000 rubs)	5, scale 1-5 (EN ISO 12945-2 to 5.000 rubs)	4, scale 1-5 (EN ISO 12945-2 to 5.000 rubs)	4-5, scale 1-5 (EN ISO 12945-2)
LIGHT FASTNESS SOLIDITÀ ALLA LUCE	7, scale 1-8 (ISO 105-B02)	7, scale 1-8 (ISO 105-B02)	7-8, scale 1-8 (ISO 105-B02)	7, scale 1-8 (ISO 105-B02)
WATER FASTNESS SOLIDITÀ ALL'ACQUA	7, scale 1-8 (ISO 105–B04)	5, scale 1-5 (ISO 105-E01)	7, scale 1-8 (ISO 105-B04)	>7, scale 1-8 (ISO 105-B04)
FLAME RESISTANCE RESISTENZA AL FUOCO	BS 5852 Part 0,1 US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	BS 5852 Part 1 US CA TB 117-2013	BS 5852 Part 1 US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)	US CA TB 117-2013 - Compliant to the criteria certifying the absence of flame retardant chemicals (AB 2998)
CLEANING LAVAGGIO	30°		40°	40°

D

only for outdoor collections
cushions / solo per cuscini
delle collezioni outdoor

D 140 D 141 D 142 D 143 D 144

Collection / Collezione

• PEDRALI

BREZZA
from D22 to D26

D 22 D 23 D 24 D 25 D 26

Collection / Collezione

• PEDRALI

SAND
from D110 to D115

D 110 D 111 D 112 D 113 D 114 D 115

Collection / Collezione

• PEDRALI

ZEFIRO
from D100 to D105

D 100 D 101 D 105 D 102 D 103 D 104

10

Simil Leather
Finta Pelle

category C

PEDRALI

C

	C90÷C95 | C60÷C64	C130÷C141	C10÷C22
COMPOSITION COMPOSIZIONE	72% PVC 25% Cotton 3% Polyurethane	76% PVC 22% Polyester 2% Polyurethane	85% PVC 15% Cotton
WEIGHT GRAMMATURA	600 g/m² (17.70 oz/yd²)	540 g/m² (15.93 oz/yd²)	830 g/m² (24.48 oz/yd²)
ABRASION ABRASIONE	100.000 cycles Martindale (EN ISO 5470-2)	60.000 cycles Martindale (EN ISO 5470-2)	150.000 cycles Martindale (EN ISO 5470-2)
RUBBING FASTNESS SOLIDITÀ ALLO SFREGAMENTO	Dry and Wet 5, scale 1-5 (ISO 105-X12)	Dry and Wet 5, scale 1-5 (ISO 105-X12)	/
LIGHT FASTNESS SOLIDITÀ ALLA LUCE	6-7, scale 1-8 (ISO 105-B02)	6-7, scale 1-8 (ISO 105-B02)	≥6, scale 1-8 (ISO 105-B02)
FLAME RESISTANCE RESISTENZA AL FUOCO	BS 5852 Part 1 EN 1021 – 1/2 IMO res. A.652 (16) UNI 9175 Classe 1 IM US CA TB 117-2013	BS 5852 Part 1 EN 1021 – 1/2 UNI 9175 Classe 1 IM US CA TB 117-2013	DIN 4102-1 B2 BS 5852 Crib 5 EN 1021 – 1/2 EN 13501-1, C-s3, d0 FAR 25.853 App F Part 1 IMO res. A.652 NF D60-013 AM18 NF P92 507 M1 NY/NJ - Port Authority UFAC Fabric Class 1 German fire standard B1 (except C12 and C22) US CA TB 133 US CA TB 117-2013
APPROVED OMOLOGATO	/		
CLEANING LAVAGGIO			

C

C 90

C 94

C 95

C 93

C 91

C 92

C 139

C 140



C 141

C 134

C 133

C 130

C 131

C 132

C 135

C 136

C 137

C 138



C 14

C 21

C 15



C 17

C 13

C 12

C 20

C 11



C 18

C 22

C 10



C 62

C 63

C 60

C 61

C 64